



FEEDER PROTECTION RELAY : ADR245B

Introduction:

ASHIDA has designed economical & reliable Multifunction ADR245B Protection & Control System. The simple and compact construction of ADITYA series ADR245B relay provides integrated Protection, Control and Monitoring functions for Over head Transmission Lines, Underground cables, and Distributed Feeders.

Functional Overview:

Key Protection & Control Functions:

- Four Independent Settings Groups.
- Directional / Non Directional Phase & Ground Over Current Protection Function (50/51/51N/51/67/67N).
- Four Independent Stages for Directional /Non Directional Phase Over Current Protection.
- Three Stages of Directional/Non Directional Internally Derived ($3I_0 >$) / Externally Measured ($IE >$) Ground Over Current Protection.
- Inverse time Over Current Protection (IEC & IEEE curves according to IEC60255).
- High Impedance Restricted Earth Fault Protection (64R).
- Thermal Overload Protection (49)
- Inverse & Definite time Negative and Positive Phase Sequence Over Current Protection (46).
- Broken Conductor Protection (46BC)

- Positive and Negative Phase Sequence Over Voltage Protection (47).
- Under and Over Voltage Protections (27 /59).
- Externally Measured (VN>) / Internally Derived (3Vo>) Residual Over Voltage Protection (59N).
- Frequency Protection (81)
- Rate of change of Frequency (81R)
- Fault Locator (21FL) (Optional)
- Sync Check (25) (Optional)
- SOTF (Optional)
- Multi shots (4-shots) Auto-reclosing function.
- Breaker Failure detection (50BF)
- VT and CT supervision function
- Trip circuit supervision function
- Programmable Inputs & Outputs
- CB Close / Trip from HMI
- Programmable & Target LEDs for indications with dual colours
- Self Supervision of relay
- Metering function
- Disturbance Recording (10 nos.)
- Event Recording (512 nos.)
- Fault Recording on HMI display (10nos.)
- Non-Volatile memory
- Fully communicable with IEC standard open protocol IEC60870-5-103, MODBUS, IEC104 & IEC 61850.
- SCADA communication
- Single / Dual Ethernet ports (RJ45 / FO), RS485 port at rear side.
- PRP/HSR option for fast & redundant network (Optional).

- PC front port communication for convenient relay settings
- User friendly local operation with key pad
- Large Liquid crystal display (20X4) with backlight
- Password Protection
- **Low energy pulse output for tripping and closing (optional)**
- If Special connector is removed from the back side of the CT Terminal, CT secondary terminal will be automatically shorted.
- Measurement of Voltage, current magnitude, symmetrical components, Real, Reactive and Apparent Power, Power factor and frequency.


Software Support:

- Online/ offline Setting Editor.
- Programmable scheme logic Editor.
- Settings upload / download.
- Online Measurement.
- Disturbance analysis.
- Relay assistant for testing relay at site

Applications:

ADR245B numerical multifunction relay is designed for Transmission line protection, Underground cable & feeder protection, Machine protection, and shunt capacitor bank protection applications. Relay designed with fast and selective tripping ensures the stability and availability of electrical power system.


ADR245B relay can be applied for protection, control & monitoring of radial and ring main feeder to achieve sensitivity and selectivity on phase and ground faults.

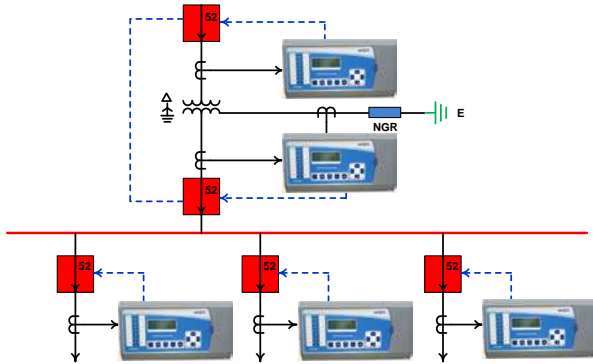

Radial feeder application


ANSI Code	Description
25	Sync Check
27	Under Voltage Protection
32P	Directional power Protection
37	Under Current Protection
46	Negative Phase Sequence Protection
46BC	Broken Conductor Detection
47	Negative Phase Sequence Over Voltage Protection
49	Thermal Overload Protection
50	Instantaneous/Definite Time Phase Over current Protection
50N	Instantaneous/Definite Time Ground Over current Protection
50BC	Broken Conductor
50BF	Breaker Failure
51	Inverse Time Phase Over current Protection
51N	Inverse Time Ground Over current Protection
51V	Voltage Dependant Over Current
55	Power Factor Protection
59	Over Voltage Protection
59N	Residual Over Voltage Protection

62	Timer Element
64R	High Impedance Restricted Earth Fault Protection
67P	Directional Phase Over current Protection
67N	Directional Ground Over current Protection
74	Alarm Output
79	Auto reclosing
81O/U	Frequency Protection
81R	Rate of change of frequency
86	Lockout (Trip command)
VTS/60	VT Supervision Detection
CTS	CT Supervision Detection
SOTF	Switch On To Fault

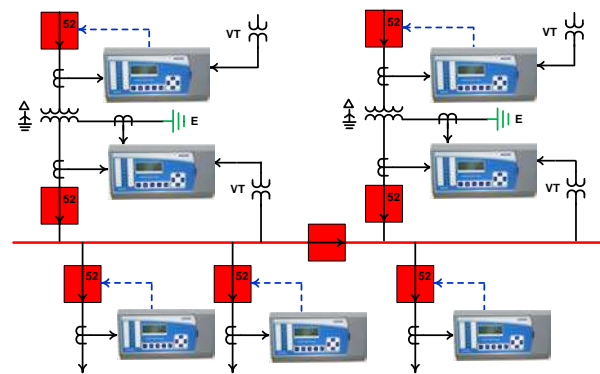

Parallel Transformer feeder application

The Functional Overview of ADR245B:

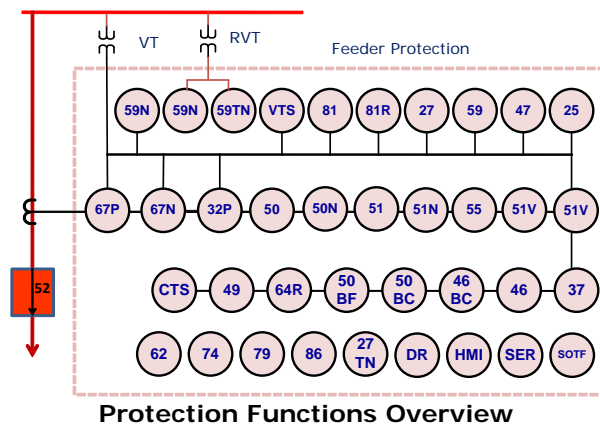

Protection Functions Overview

Directional / Non Directional Over Current Protection

(50/50N/51/51N/51V/67P/67N):


The core functionality of ADR245B relay is equipped with multi function feeder protection. The relay provides Directional and Non Directional phase and ground over current protection with multiple settings (four stages for phase over current and three stages for ground over current) for various power system applications and wide range of protection settings. The relay is equipped with digital filter algorithms, which provides the rejection of higher harmonics & DC offset. Selectable IEC/IEEE inverse time curves with directional/non directional over current protection will be provide greater selectivity, flexibility and sensitivity to users for better relay co-ordinations.

ADR245B relay provides inverse time over current characteristic for phase and ground over current elements. Each stages of phase and ground over current elements are independently setttable with inverse time or definite time characteristic. The following tripping characteristics are available;

- IEC Characteristic Curves
- IEEE Characteristic Curve
- Definite Time Over current
- User Define over current


$$t = T^* \left\{ \frac{K}{\left(\frac{I}{I_s} \right)^\alpha - 1} + L \right\}$$

Curve Description	K	α	L
Definite Time	-	-	-
IEC S Inverse	0.14	0.02	0
S Inverse 1.3S	0.06	0.02	0
IEC V Inverse	13.5	1	0
IEC E Inverse	80	2	0
UK LT Inverse	120	1	0
Define Time	-	-	-
IEEE M Inverse	0.0515	0.02	0.114
IEEE V Inverse	19.61	2	0.491
IEEE Inverse	28.2	2	0.1217
US Inverse	5.95	2	0.18
US ST Inverse	0.0239	0.02	0.0169
User Define Curve 1	-	-	-
User Define Curve 2	-	-	-

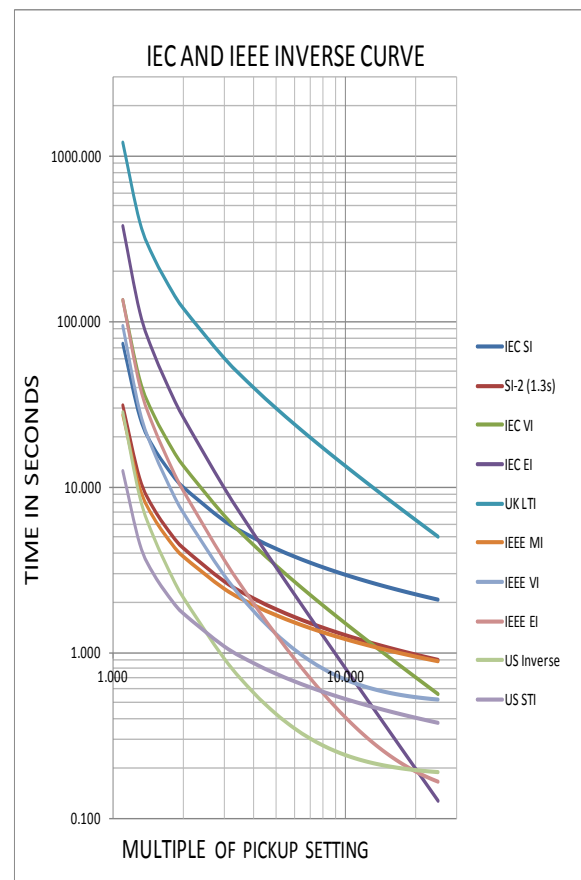


IEC/IEEE Inverse curves for tripping of over current elements


Directional element of relay will decide faults in forward/reverse direction by voltage & current flows on over head transmission line / underground cable during faults. RCA/MTA setting range of relay will provide flexibility to user to set directional angles based on power system parameters. Operating time of directional element shall be settable instantaneous or with definite & inverse time delay.

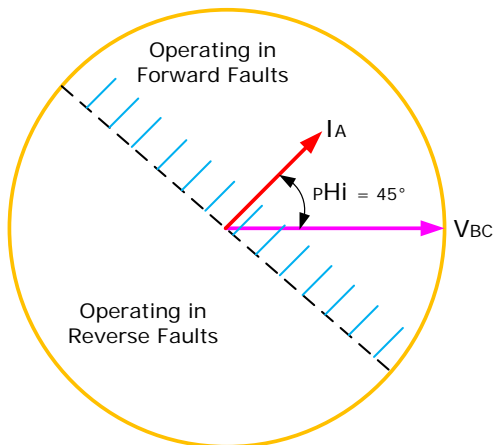

Directional discrimination for phase to phase fault

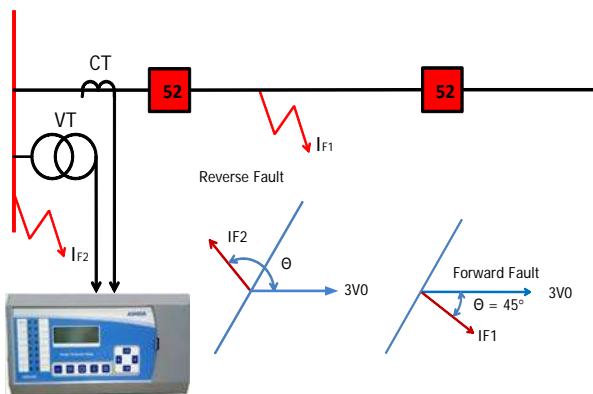


Directional determination for Ground faults

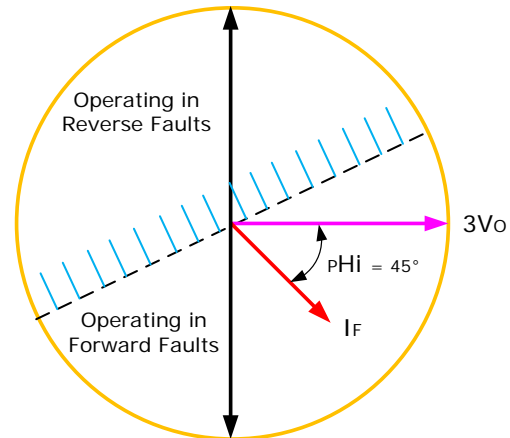

Directional discrimination for phase to ground fault


ADR245B relay provides three stages of definite time/inverse time internally derived zero sequence over current ($3I_0$) protection to detect asymmetrical faults in electrical network. It can be applied to over head transmission line, underground cable, and feeder. The ground current ($3I_0$) can be calculated from three line currents.

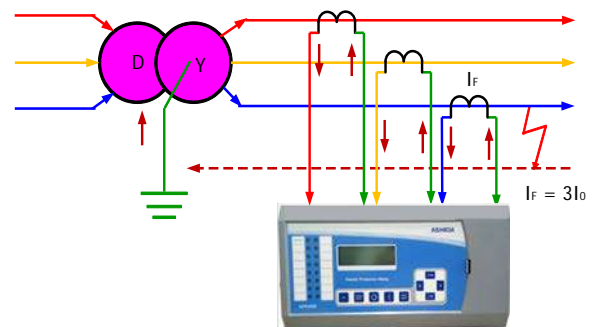


Derived Zero sequence over current from three phases

ADR245B relay provides three stages of externally ground over current protection. ADR245B relay measures ground fault current through neutral CT input. Externally ground CT input can also be applied for high impedance restricted earth fault

protection or for sensitive ground fault protection through CBCT.

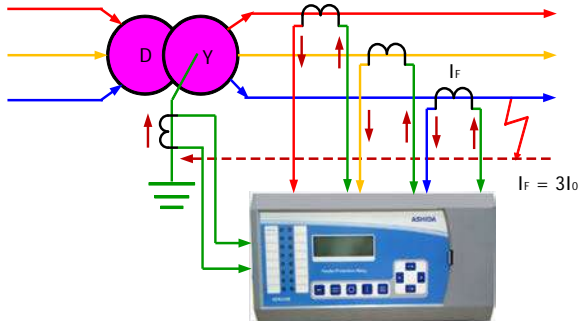

Externally measured ground over current through neutral CT

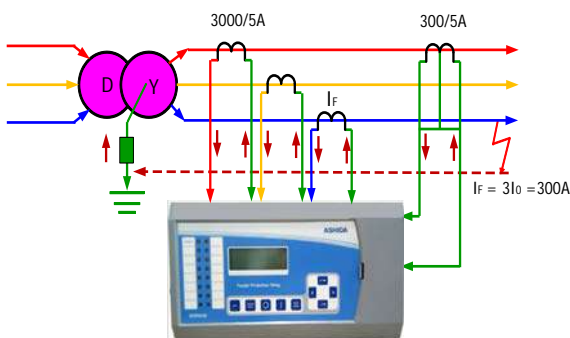


Externally measured ground over current through CBCT

Voltage controlled over current (51V) protection can be applied for distributed generator against phase faults. Protection function is selectable in over current menu.

Thermal overload Protection (49):


ADR245B relay provides thermal over load protection of transformer against over load conditions. Relay estimates thermal content and initiate alarm & tripping if the thermal contents are higher than the preset value. Trip time of relay follows the thermal time constant value set in relay.

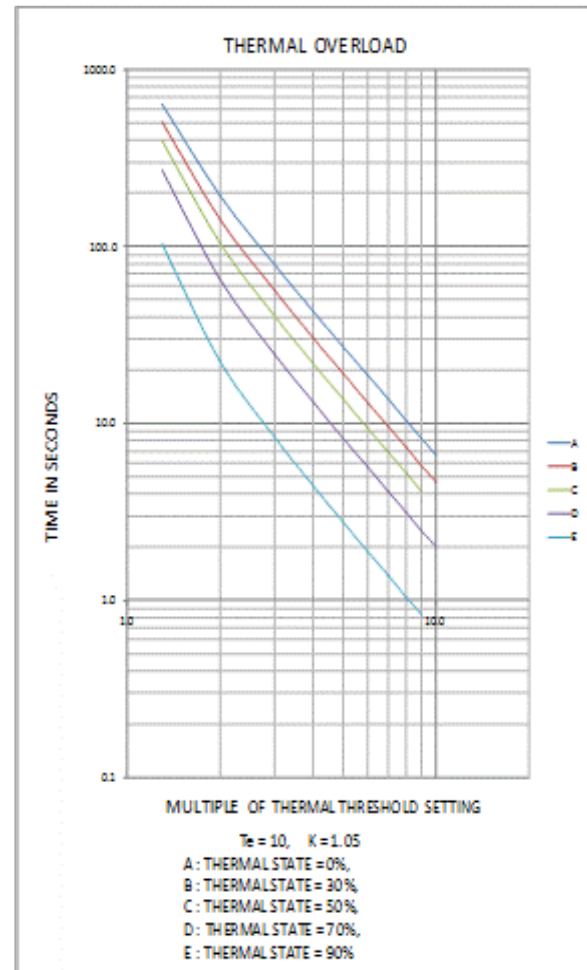

Graph of Thermal Overload Characteristic.


Sequence Over Current Protection (50P/46):

ADR245B provides sequence over current against unbalance faults/condition or high impedance faults over transmission line/under ground cable or over load condition. Sequence over current function is provided in two modes; Positive sequence and Negative sequence over current function. User can select the mode based on their application and requirement.

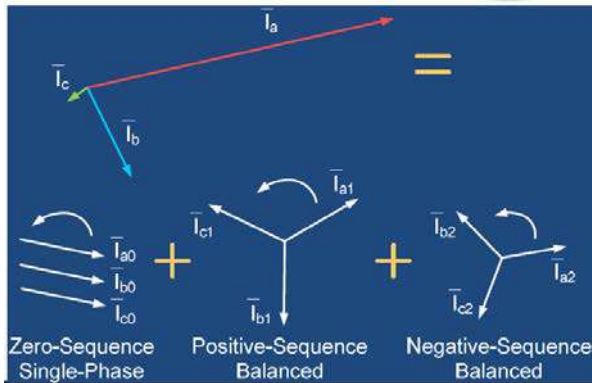


The negative phase sequence over current element can be programmed as IDMT or definite time characteristic. ADR245B relay provides ten selectable IEC & IEEE inverse curves for each stage.

Protection can also be applied in a condition when there is a very high resistive ground fault and ground element may not sense the fault current.

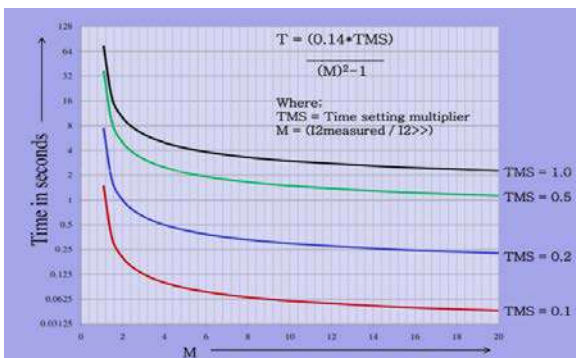

Broken Conductor Protection (46BC):

ADR245B is equipped with Broken conductor detection protection. Broken conductor condition can be detected by the ratio of Negative sequence current to Positive sequence current (I_2/I_1). Protection provides higher sensitivity on High resistive fault.

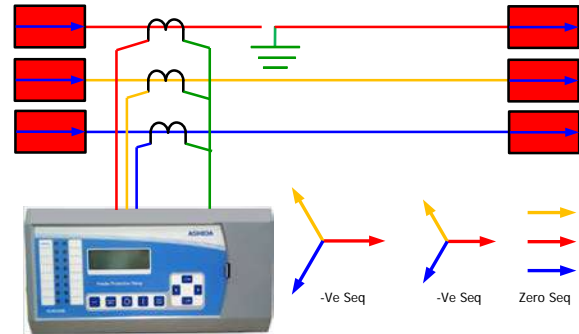


I0/I1 detection:

ADR245B provide independent I0/I1 function for sensitive ground fault detection. Relay measure the ratio of zero to positive sequence current precisely.

Over & Under Voltage Protections (59/27):

ADR245B relay provides independent phase over and under voltage protections with definite time delay range. Relay also provides the positive sequence over voltage protection with definite time characteristic option. Protection functions can be programmed for alarm signal or trip signal.

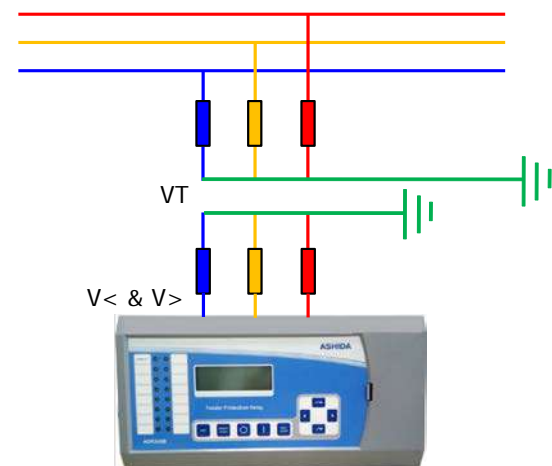


Under & Over voltage detection through 3-phase VT connection

Residual Over Voltage Protections

(59N):

ADR245B relay provides zero sequence / residual over voltage protection with definite time delay range. Protection can be achieved by externally measured residual voltage through open delta VT or the zero sequence voltage internally calculated from three phases.

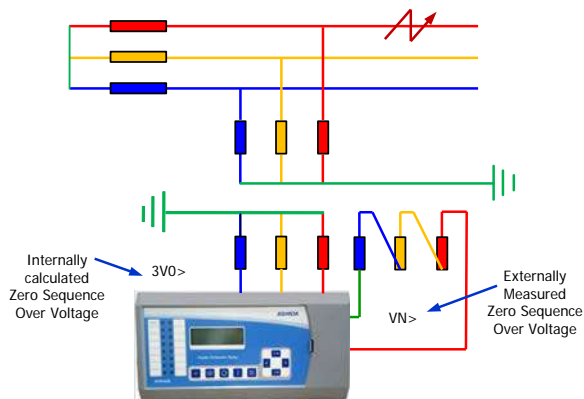


Zero sequence Over voltage / Externally measured residual Over Voltage detection through 3-phase VT & Open delta VT connections

Sequence Over Voltage Protections

(47):

ADR245B relay provides positive/negative sequence over voltage protections with definite time delay range. It provides protection against high resistive faults and unbalanced loading condition.

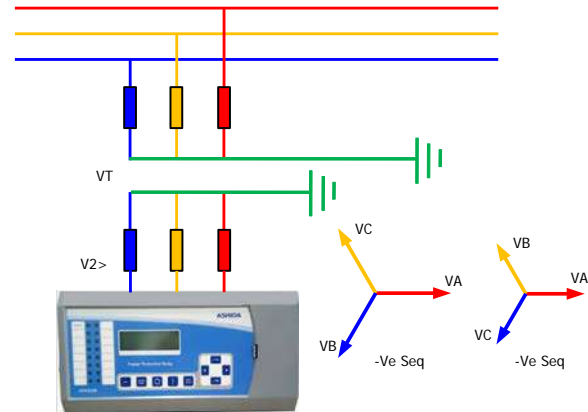

Positive/Negative Phase Sequence Over voltage detection through 3-phase VT connection

Directional Power Protection (32):

The directional power protection is designed for protection against reverse power mode and over / under load protection in forward power mode. It can also be settable as a active / reactive power mode. ADR245B provides four elements for power protection with independent definite time delay characteristic.

Frequency Protection (810/U):

Frequency protection function provides either under or over frequency protection of line/feeder/machine. ADR245B relay provides six independent stages with definite time delay characteristic. Stages can be set in a under or over frequency mode. Protection function can also be used for load shedding scheme.

Rate of change of frequency - 81R

(df/dt) :

This Protection function is used for quick

disconnection of a generator or load shedding control. Based on the calculation of the frequency variation, it is insensitive to transient voltage disturbances and therefore more stable than a phase-shift protection function.

Synch-check (25) (Optional):

This function helps to monitor the voltages on both sides of a circuit breaker and determines that proper phase angle and voltage exist prior to allowing the breaker to be closed.

Fault locator (21FL) (optional):

The fault locator (FL) is designed to estimate the distance of the fault in the feeder using fundamental phasor magnitude of the voltage and current signals.


Breaker Failure detection (50BF):

If the fault current is not interrupted even after a expiry of time delay, circuit breaker failures shall be detected, and should execute trip command to upstream circuit breaker. ADR245B relay incorporates circuit breaker failure protection to detect failure of tripping command execution due to mechanical or electrical problems in circuit breaker.

SOTF

The ADR245B provides SOTF function to protection feeder against switch on to fault

condition during feeder/transformer energization. (SOTF can be achieved by using Group change facility through AProLogic)

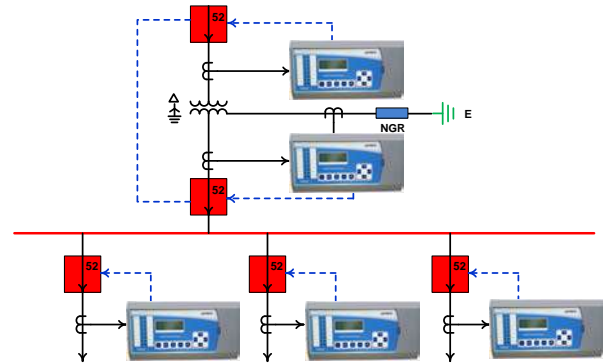


Trip circuit supervision (74T):

The trip circuit supervision is used to monitor healthiness of circuit breaker. The trip circuit extends beyond the relay enclosure and passes through more components, such as fuse, wires, relay contacts, auxiliary switch contact and so on. The failure of any component result bypassing the protection. The relay is provide with special trip circuit supervision function which continuously monitor continuity of trip circuit and generate ALARM to take appropriate action.

Reclosing / Auto reclosing (79):

The ADR245B is provided with 4 shot Auto recloser function. Numbers of shots are selectable. There are 4 timers for auto recloser 1) Dead Time for shot 1 (DT1) 2) Dead Time for shot 2 (DT2) 3) Dead Time for shot 3 (DT3) 4) Dead Time for shot 4 (DT4) and 5) Reclaim Time (RT). After

criteria; by detecting a ratio of derived negative to positive sequence currents & ratio of derived zero sequence to positive sequence currents in the absence of a corresponding derived negative & zero sequence voltage from VT.

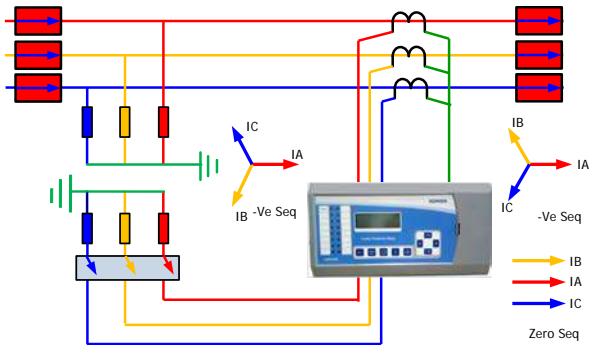

Impulse Output for the Trip and Close Coil: (Optional)

Low Energy tripping coil of the circuit breaker can be connected to the coil terminal marked as (J OUT-1 + and -, J OUT-2 + and -) at back terminal.

The trip energy (12 - 24 VDC \pm 0.1 W/sec) is provided by a capacitor in the protection relay.

Note: Pulse Output is available only in 11DO Model.

Programmable Inputs, Outputs & Logic:

The relay is provided with tool known as AproLogic, in which user can program his/her logics as per the requirement. such as Motor reacceleration/ Auto Bus Transfer Scheme (ATS) etc. All type of gates such OR/NOR/NOT/NAND/AND/XOR/XNOR/SR

Flip-flop are available along with Operating and Resetting Timer. For more details please refer to Instruction Manual.

The Enhanced version of ADR245B available in 10DI-11DO and 10DI-16DO combination. (ref. ordering option)



Back side Terminals ADR245B


Programmable LEDs and Pushbuttons:

The ADR245B relay provides total 16 nos. of target and programmable LEDs with dual color indications and 2 nos. of programmable pushbuttons for circuit breaker close and open from HMI of relay. The LEDs and pushbuttons can be programmed through PC software (RTV2 software).

Event recording:

ADR245B relay provides a feature to record and store 512 nos. of events (with event time stamping of 1mSec precision) in non-volatile memory through internally by protection and control functions and externally by triggering the digital inputs. And these can be extracted using communication port or can be seen on the LCD. The event can be triggered on time



stamp through time synchronization or through internal clock setting.

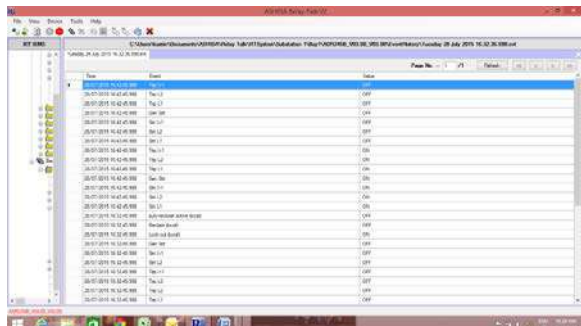

Disturbance recording:

ADR245B relay provides built in disturbance recording facility for recording analogue and digital channels. Relay records 10 nos. of disturbances and stores it in non-volatile memory. Disturbance records can be saved in IEEE COMTRADE format and same can be analyzed in disturbance analysis software.

For saving DR two mode of sampling are available, first is RAW samples (DR of 1.5 seconds) & second is 16 samples (DR of 3 seconds), user can set as required.

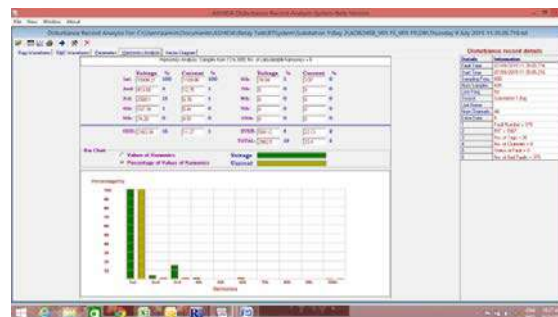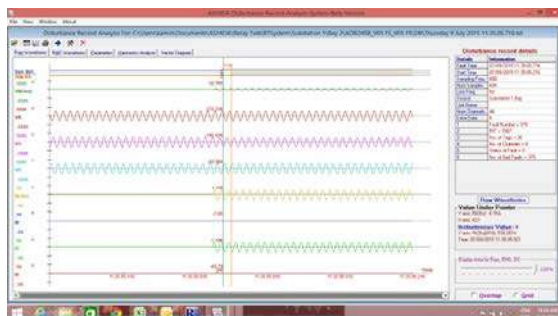

Fault recording:


ADR245B relay provides fault recording facility. The fault records can be display either on HMI displayed or in RTV2 software. The relay can record 10 nos. of fault records in non-volatile memory.

Metering:

Online metering feature of ADR245B relay provides metering of parameters (i.e voltage/current magnitude, power, power factor measurement etc.) on HMI display or in RTV2 software.

Relay Assistant:

RTV2 software provides relay assistant tool for testing and commissioning of relay at site/field area.

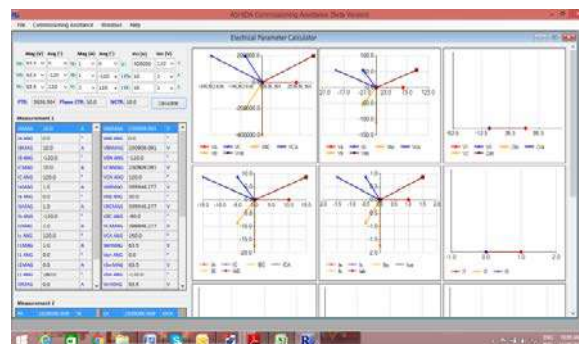

Independent Protection settings groups:

ADR245B relay provides four independent setting groups which allows the relay to operate on different power system conditions.

IEC 60870-5-103 Protocol:

ADR245B relay provides internationally standardized protocol for communication via RS485 port of protection relays. IEC 60870-5-103 protocol is used worldwide and supported by relay manufacturers.




Ethernet base Protocol (IEC 61850 /MODBUS TCP / IEC104):

ADR245B relay provides internationally standardized protocol such as IEC61850 / IEC104 / MODBUS TCP for substation automation via Ethernet port of protection relays (Ref ordering information for details)

IEC61850 GOOSE and Interoperability:


ADR245B support standard GOOSE messaging for relay to relay communication. Any logical (pickup , trip,

etc) and physical (Digital Optical Isolated signal such CBNO /NC etc) can be publish via GOOSE configurator. ADR245B support total 16 simultaneous GOOSE signal which can publish and received by other relays having IEC61850 protocol. Similarly ADR245B can able subscribed total 16 nos of simultaneous signal published by other relays and can be use for interlocks. The ADR245B is tested for most of other make relays.

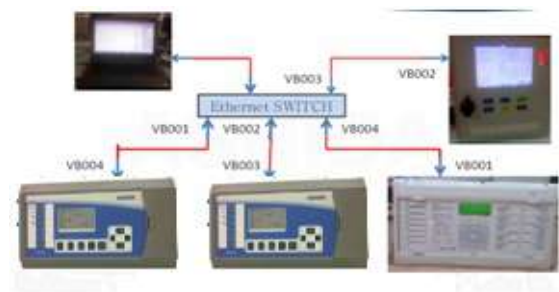


Parallel Redundancy Protocol (PRP) and High-availability Seamless Redundancy (HSR):

Parallel Redundancy Protocol (PRP) and High-availability Seamless Redundancy (HSR) provides redundant communication over station bus running the available communication protocols. Redundant communication is obtained through the built-in PRP and HSR features which can be used in star or ring bus architectures.

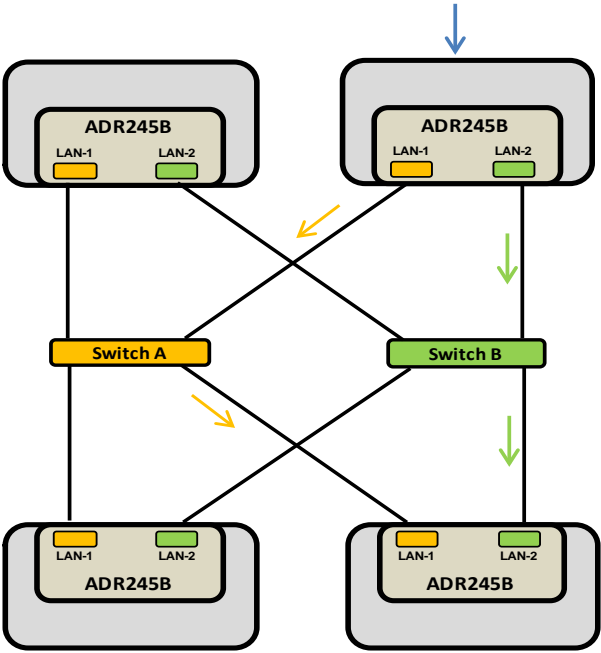

Parallel Redundancy Protocol (PRP)

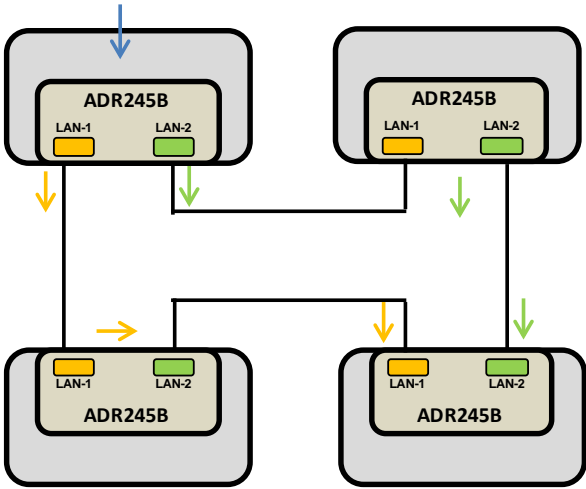

High Availability Seamless Redundancy (HRS)


Typical Tests Information:

The Relay Confirm to following standard		
Electromagnetic Compatibility Type Test:		
Sr. No.	Test	Standard
1.	High Frequency Disturbance Test	IEC60255-26 (ed-3):2013, IEC60255-22-1
2.	Electrostatic Discharge Test	IEC60255-26 (ed-3):2013, IEC60255-22-2
3.	Fast Transient Disturbance Test	IEC60255-26 (ed-3):2013, IEC60255-22-4
4.	Surge Immunity Test	IEC60255-26 (ed-3):2013, IEC60255-22-5
5.	Power Frequency Magnetic Field Immunity Test	IEC60255-26 (ed-3):2013, IEC61000-4-8
6.	Radiated Electromagnetic Field Disturbance Test	IEC60255-26 (ed-3):2013, IEC60255-22-3
7.	Conducted Disturbance Induced By Radio Frequency Field	IEC60255-26 (ed-3):2013, IEC61000-4-6
8.	Power Supply Immunity Test	IEC60255-26 (ed-3):2013, IEC60255-11 & IEC61000-4-11
9.	Conducted & Radiated frequency Emission Test	IEC60255-26 (ed-3):2013, IEC60255-25
Insulation Tests:		
10.	High Voltage Test	IEC60255-27
11.	Impulse Voltage Test	IEC60255-27
12.	Insulation Resistance	IEC60255-27
Environmental tests:		
13.	Cold test	IEC-60068-2-1
14.	Dry heat test	IEC-60068-2-2
15.	Damp heat steady state test	IEC-60068-2-78
16.	Change of Temperature	IEC-60068-2-14
17.	Damp heat cyclic test	IEC-60068-2-30
18.	Enclosure Protection Test (IP54)	IEC 60529
CE compliance		
19.	Immunity	IEC-60255-26
20.	Emissive Test	IEC- 60255-26
21.	Low voltage directive	EN-50178
Mechanical tests		
22.	Vibration Endurance Test	IEC 60255-21-1
23.	Vibration Response Test	IEC 60255-21-1
24.	Bump Test	IEC 60255-21-2
25.	Shock Withstand Test	IEC 60255-21-2
26.	Shock Response Test	IEC 60255-21-2
27.	Seismic Test	IEC 60255-21-3

Drawings Information:



	Drawing References	: For Cabinet Type	- MAC01964
		: For Back Connections (16DO & 10DI)	- ADV09902
		: For Typical External Connections (16DO & 10DI)	- ADV05605
		: For Back Connections (11DO & 10DI)	- ADV10102
		: For Typical External Connections (11DO & 10DI)	- ADV09405
		: For Back Connections (11DO & 10DI) – With Pulse O/P	- ADV13701
		: For Typical External Connections (11DO & 10DI) – With Pulse O/P	- ADV13803
		: IRIG-B TTL Connection Diagram	- ADV07803

Mounting Information:

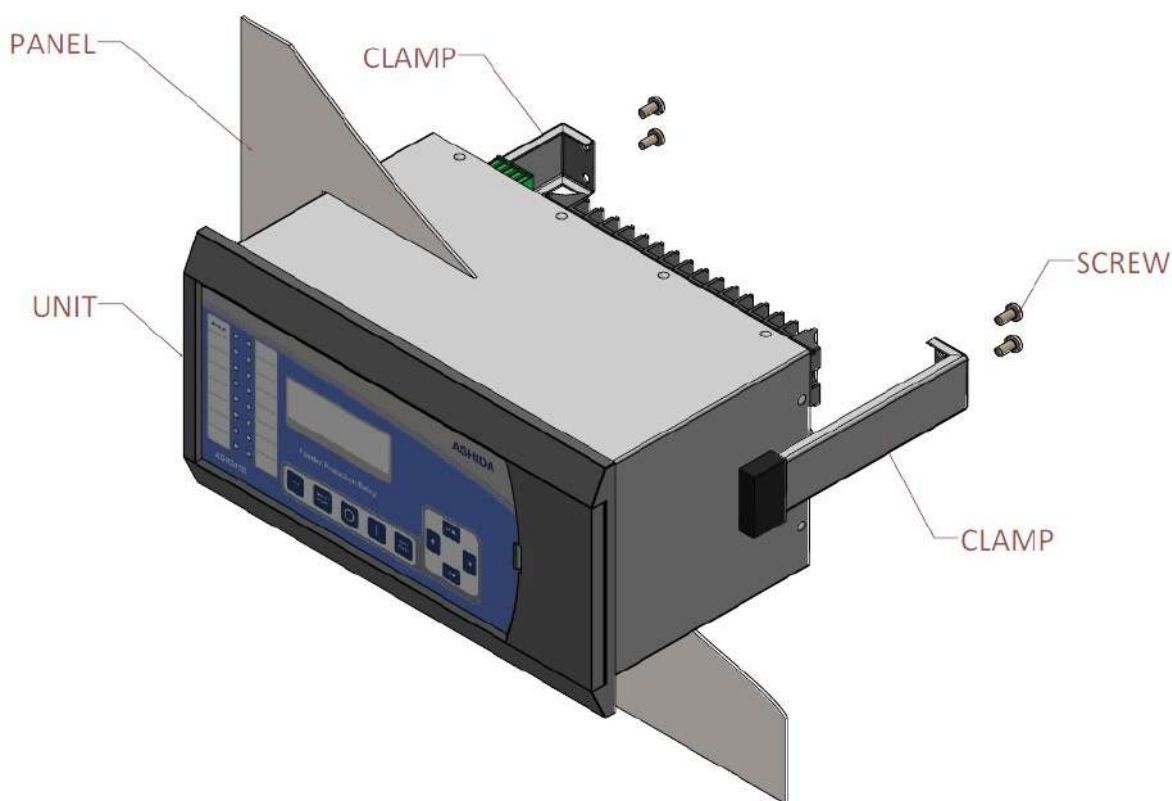



ADFR245B Enhance – Flush mounting arrangement

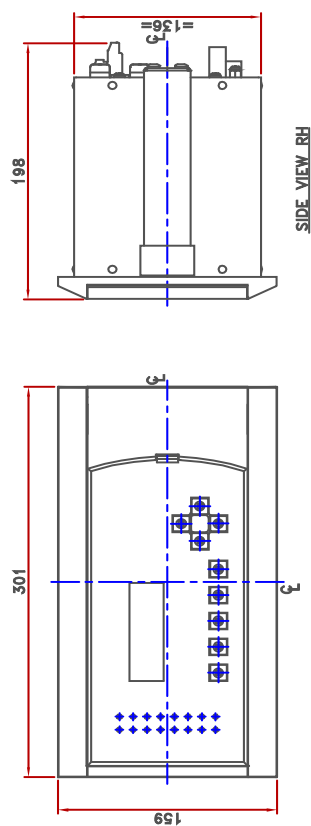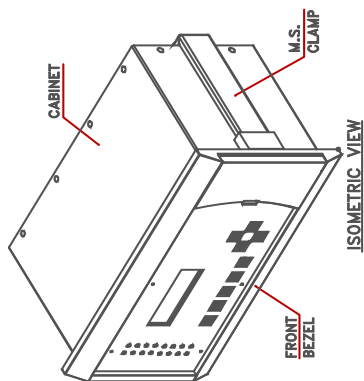RevNo	Revision note	Date	Prepared	Checked
1	Original Revision	31-12-15	Sikhan	SG
2				




NOTE:


1. PANEL CUTOUT 282mm x 140mm.
2. FRONT BEZEL SIZE 301mm x 159mm.
3. BOX SIZE WITH CLAMP 301mm. x 159mm. x 198mm.
4. ALL DIMENSIONS ARE IN MM.

	TOL : ±0.2MM		MATERIAL :-		PROJECTION:-		
	Prepared by RV	Checked by SG	Approved by SMK	Date 31-12-2015	Scale 1 : 3		
TITLE : CABINET CSD ASHIDA Electronics Pvt.Ltd.							
Drawing —				Ref.:-MAC01964	Revision 01	Sheet 1/1	


Back Terminal Details (16DO & 10DI) :

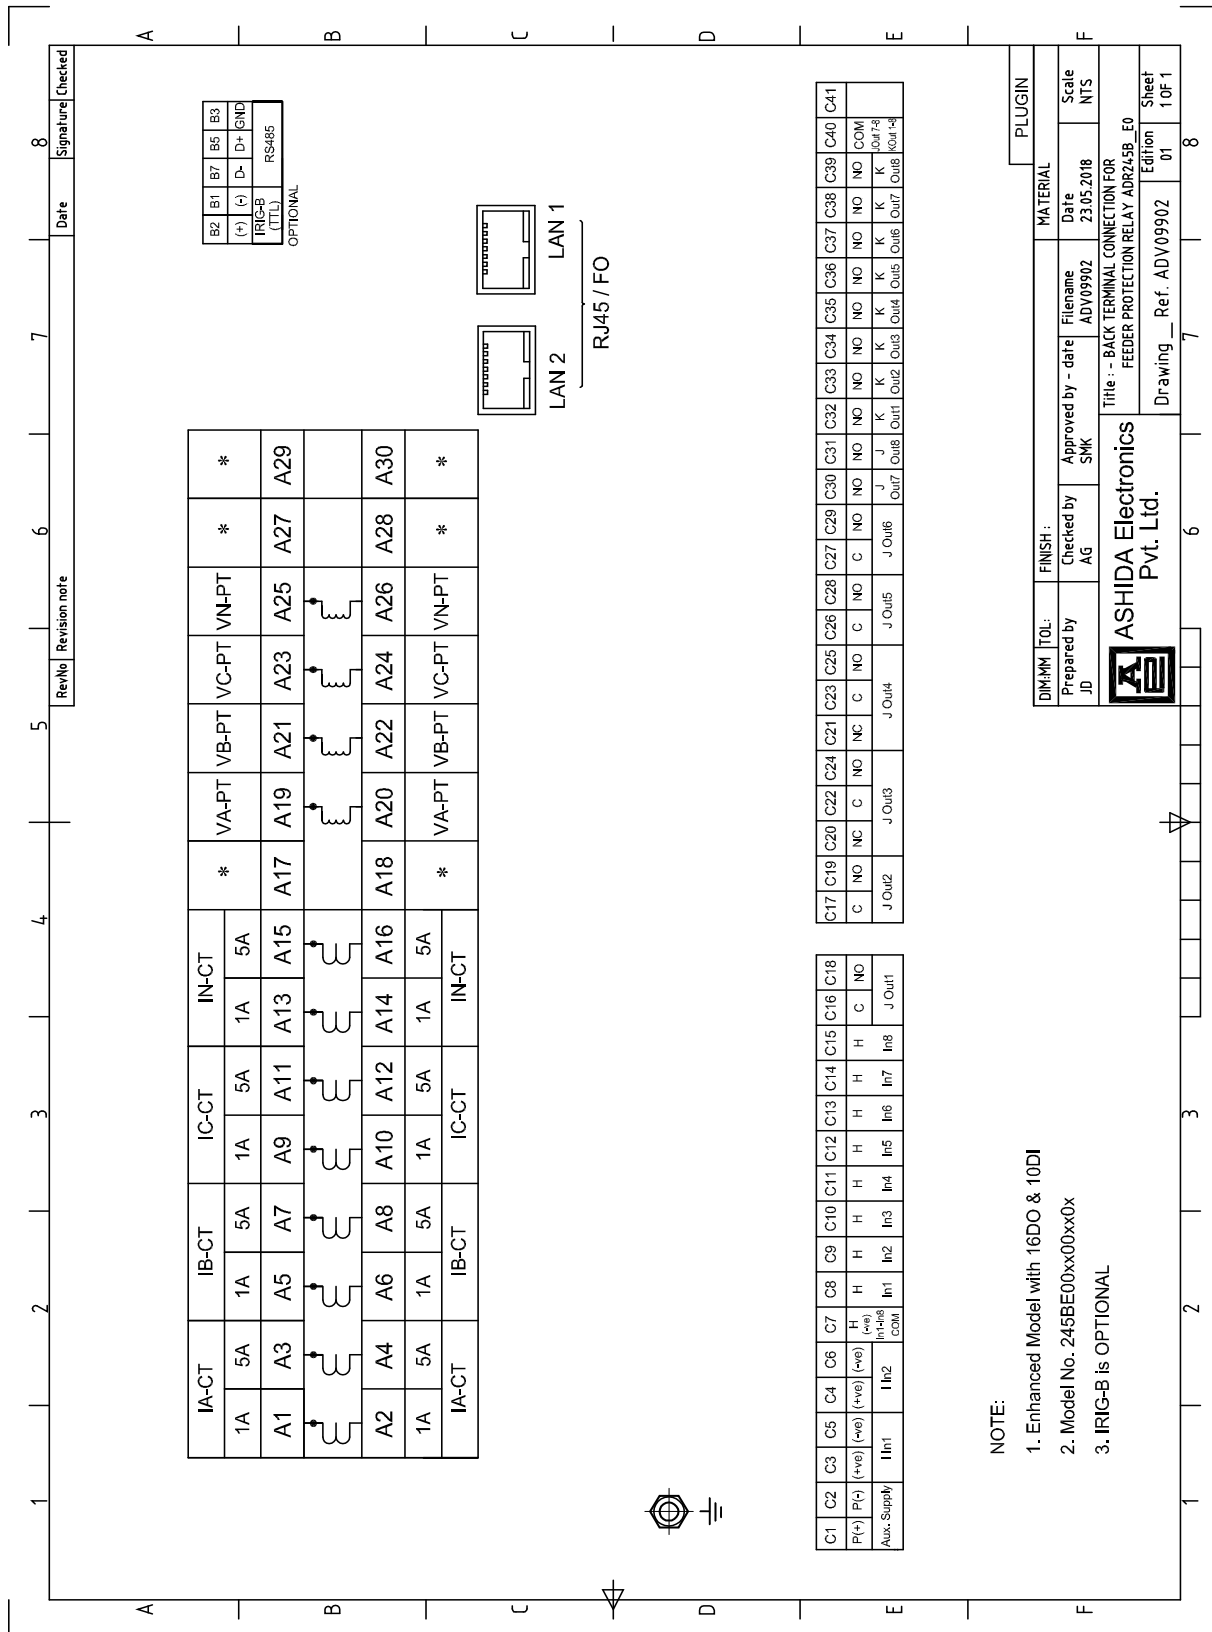


Electrical Connection Details (16DO & 10DI) :

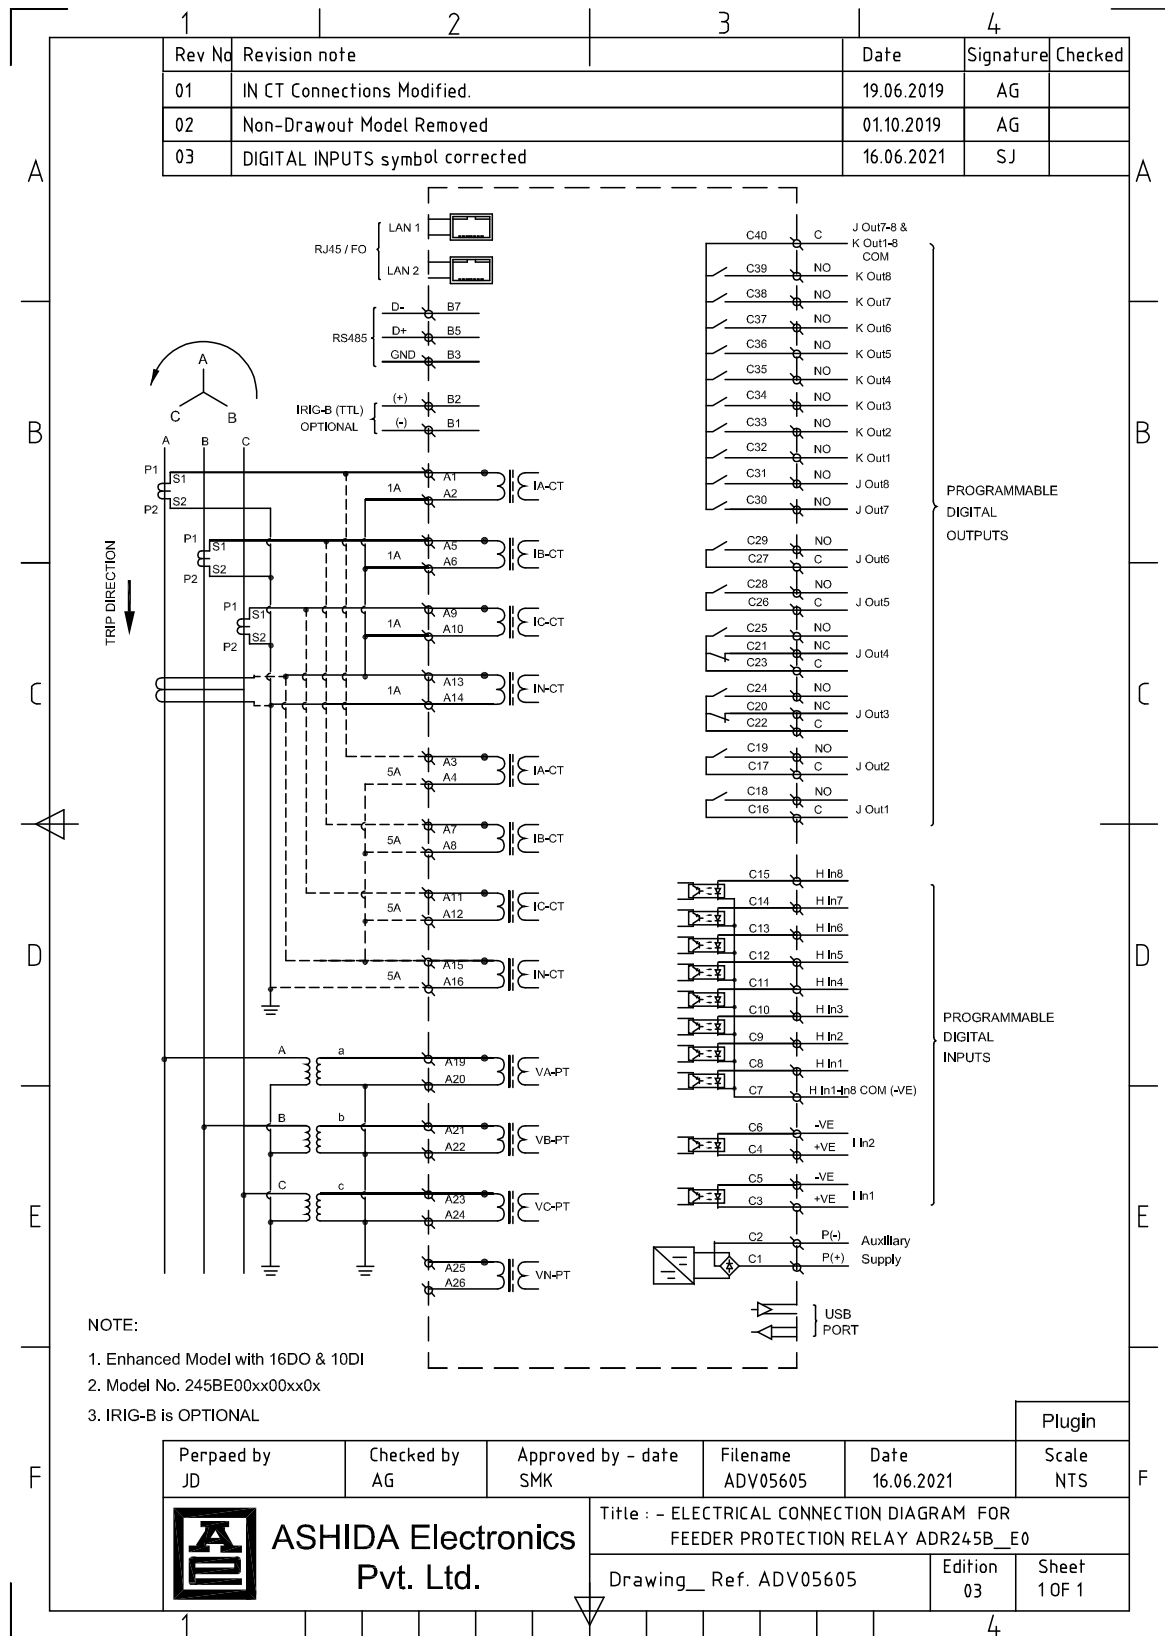


Back Terminal Details (11DO & 10DI) :

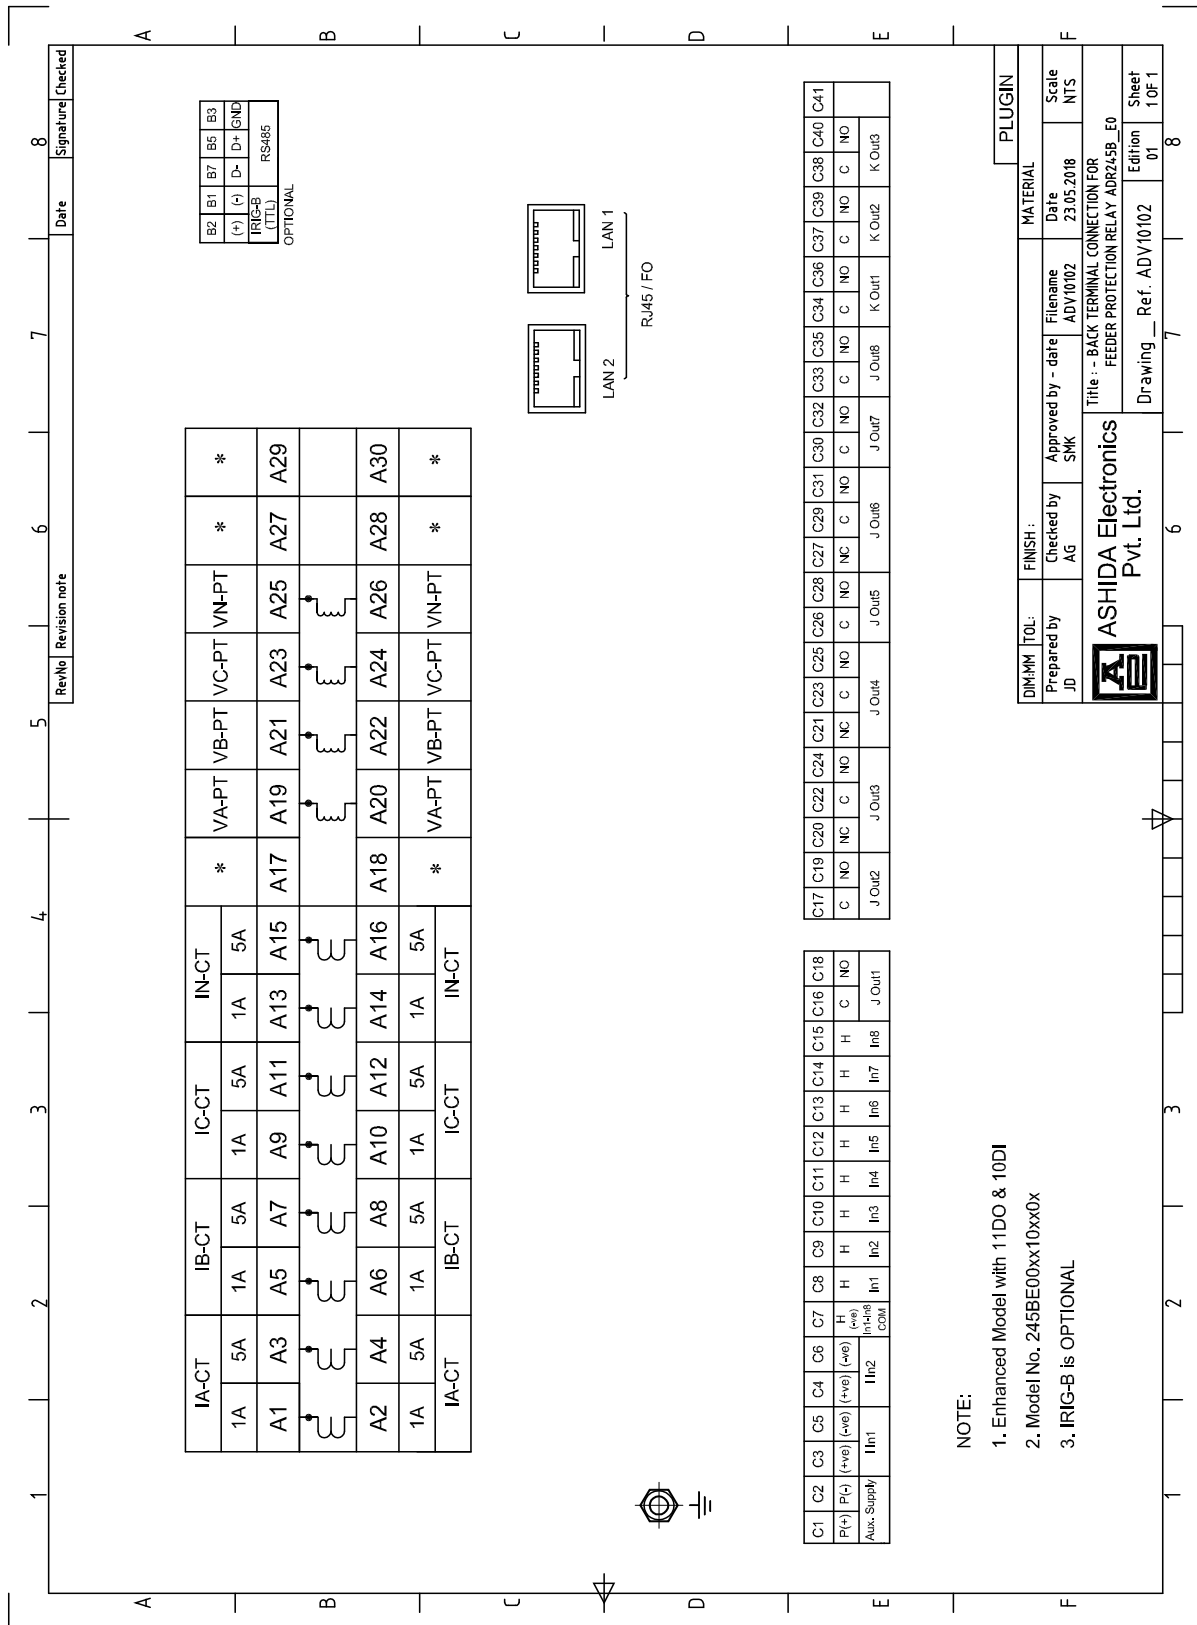


Electrical Connection Details (11DO & 10DI) :

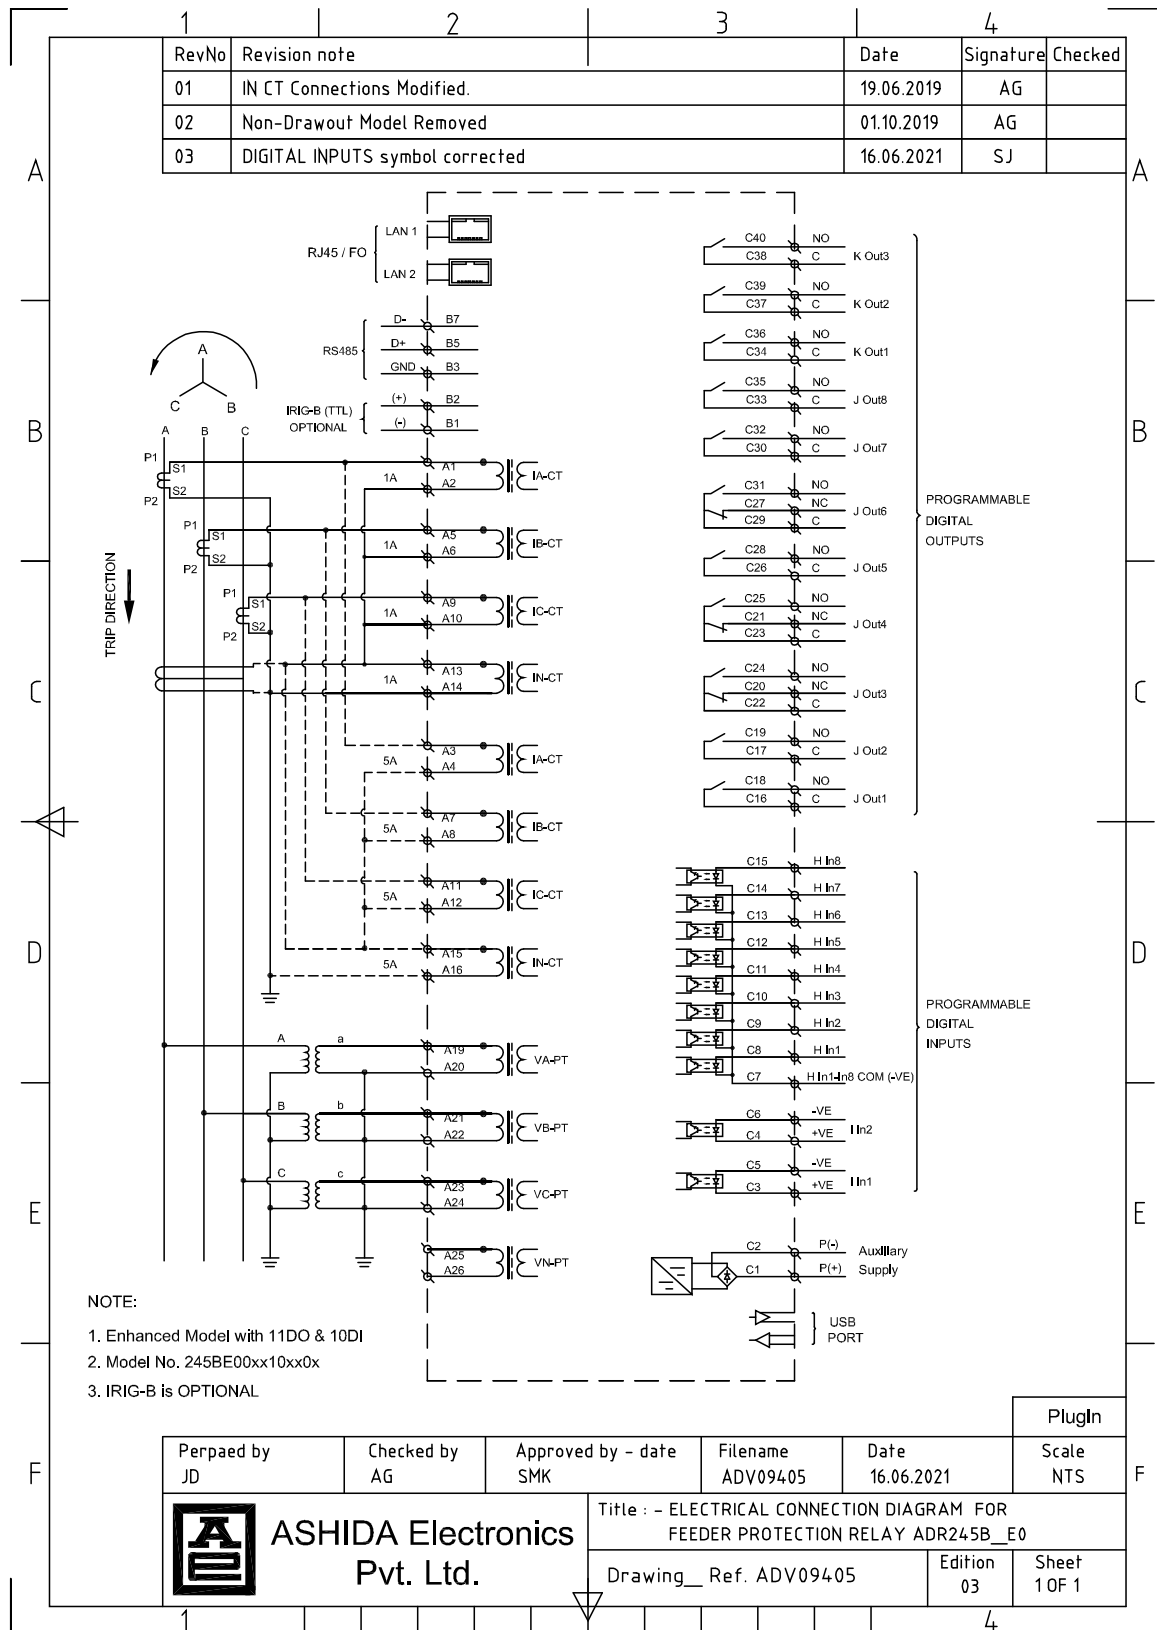


Back Terminal Details – Pulse O/P (11DO &10DI) :

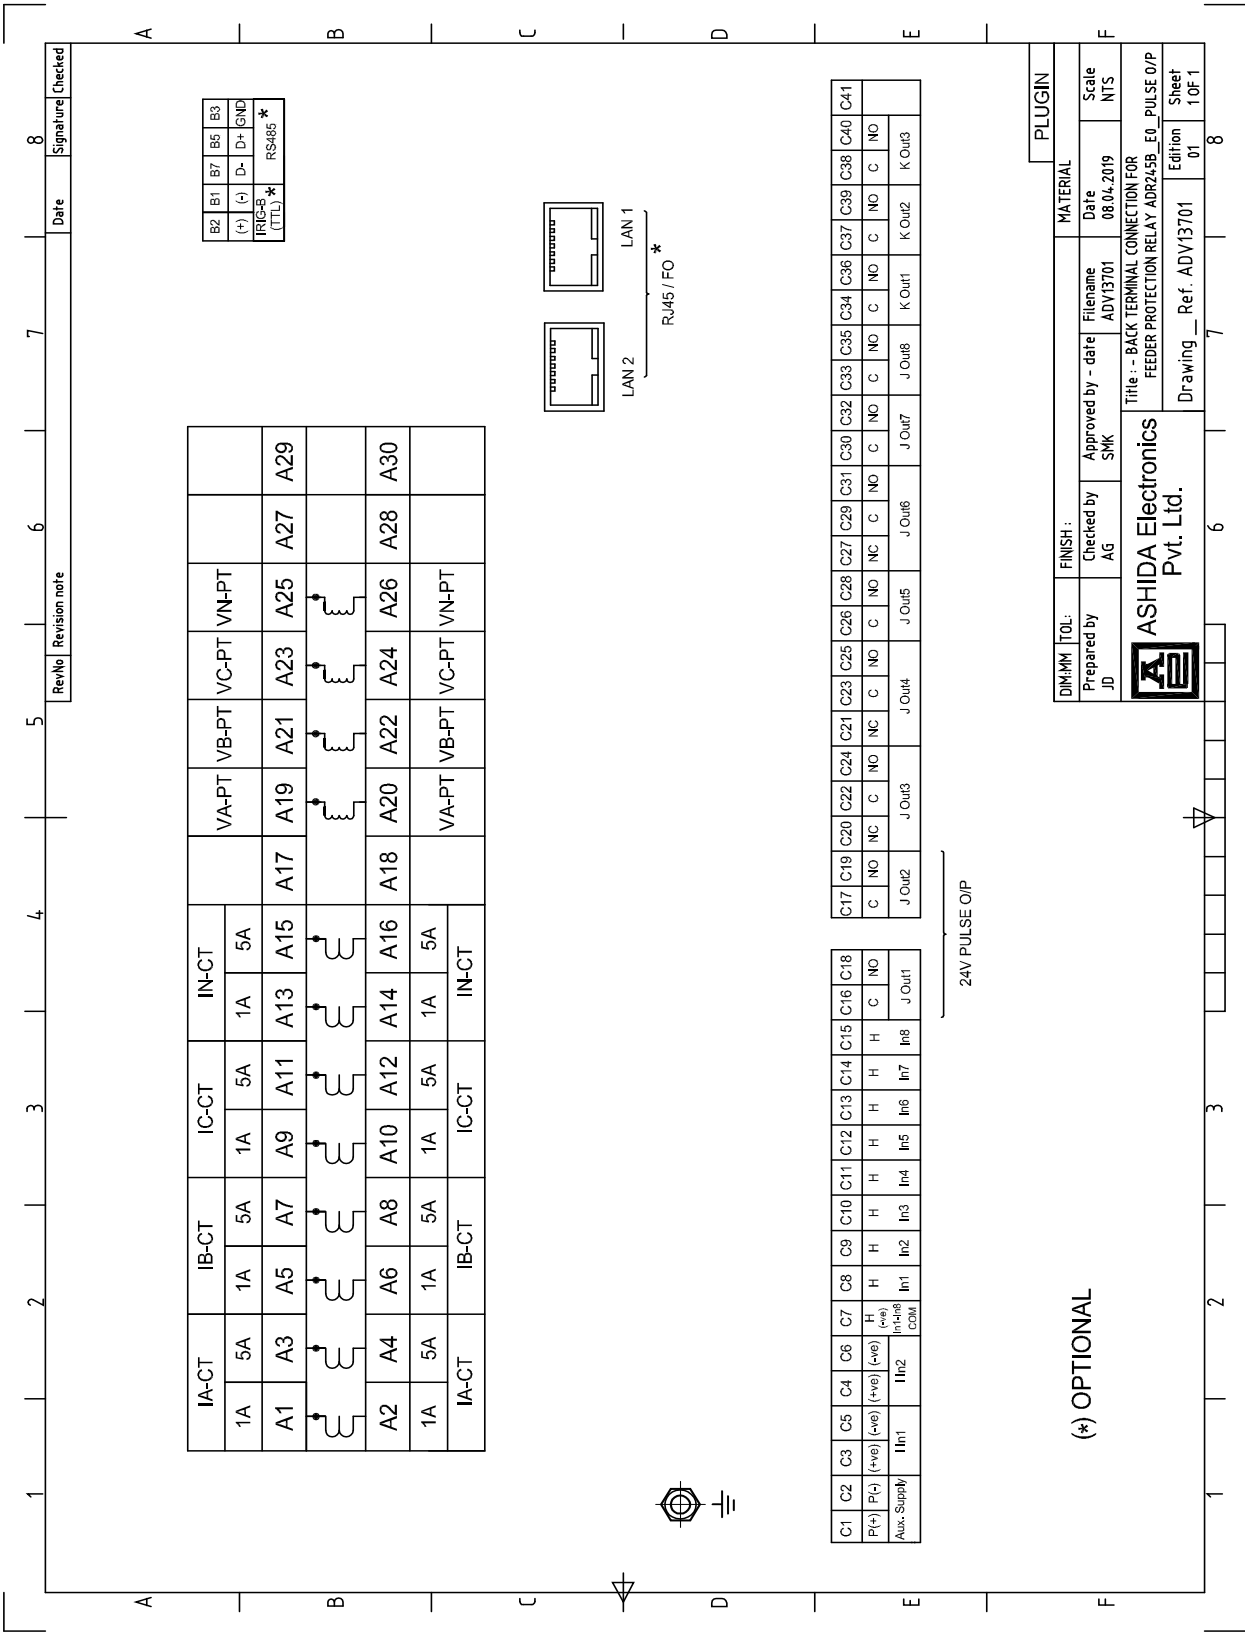

Electrical Connection Details – Pulse O/P (11DO & 10DI) :

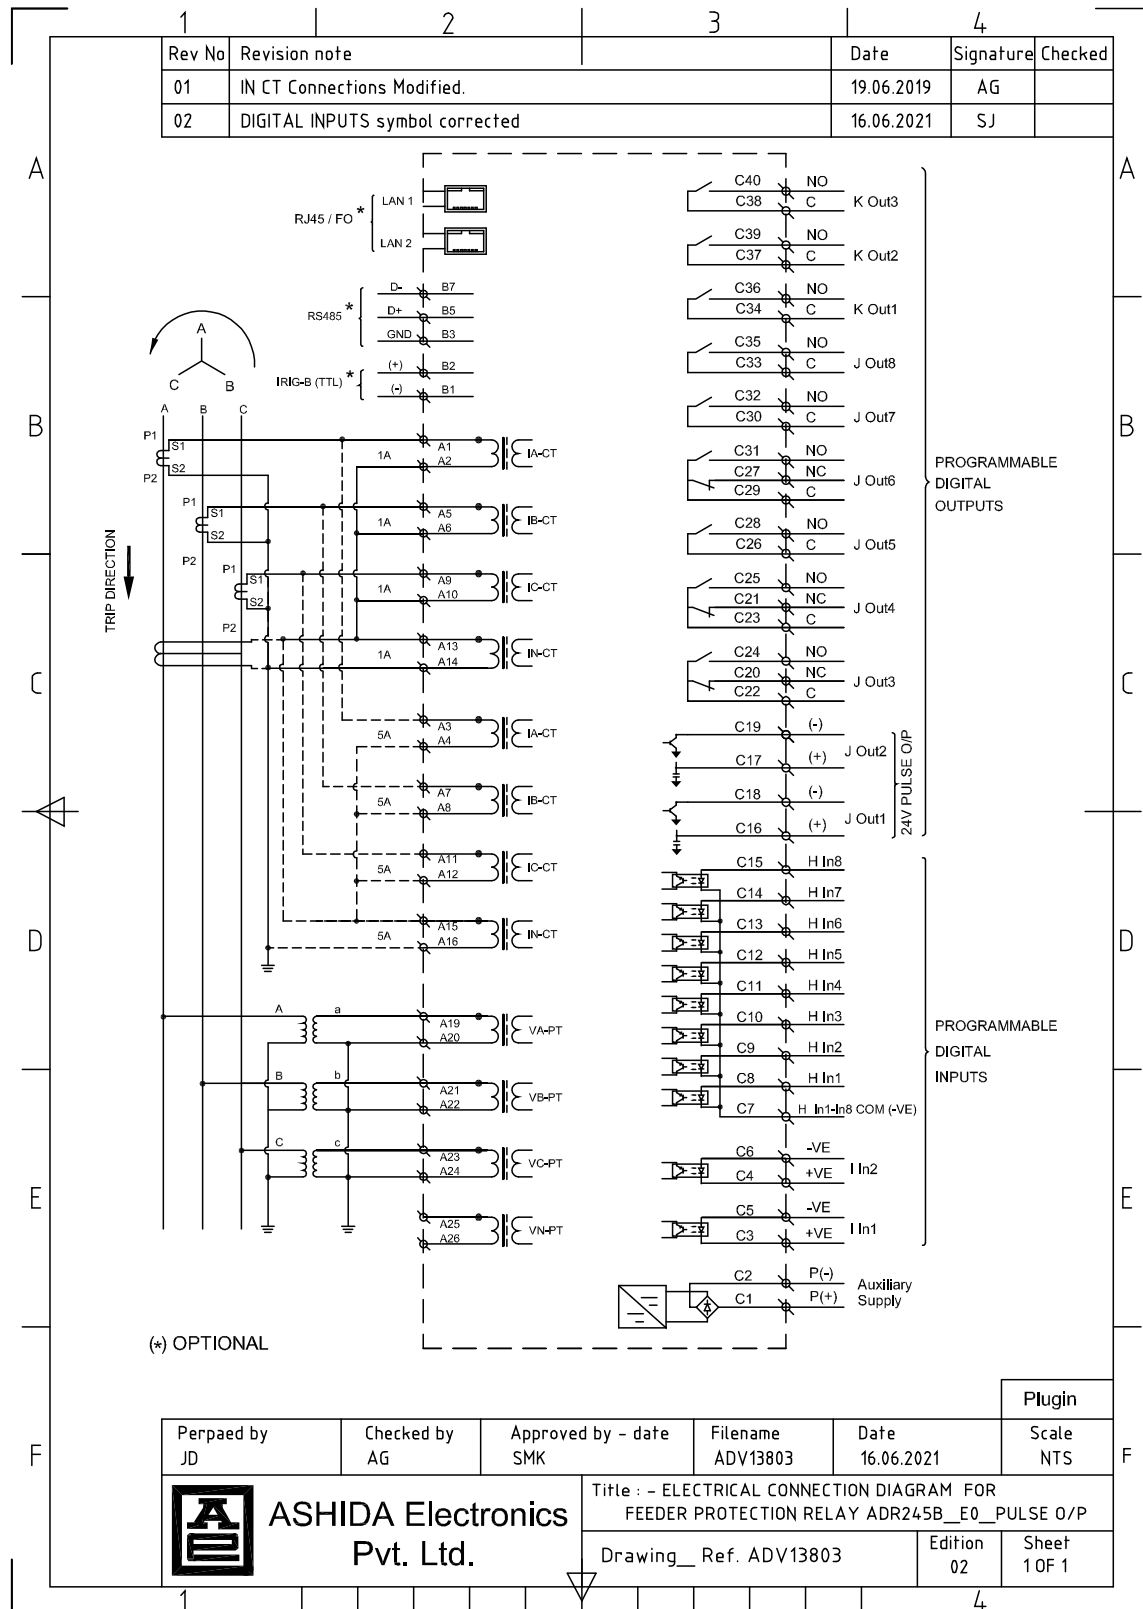

IRIG-B TTL – Transmit and receive connection

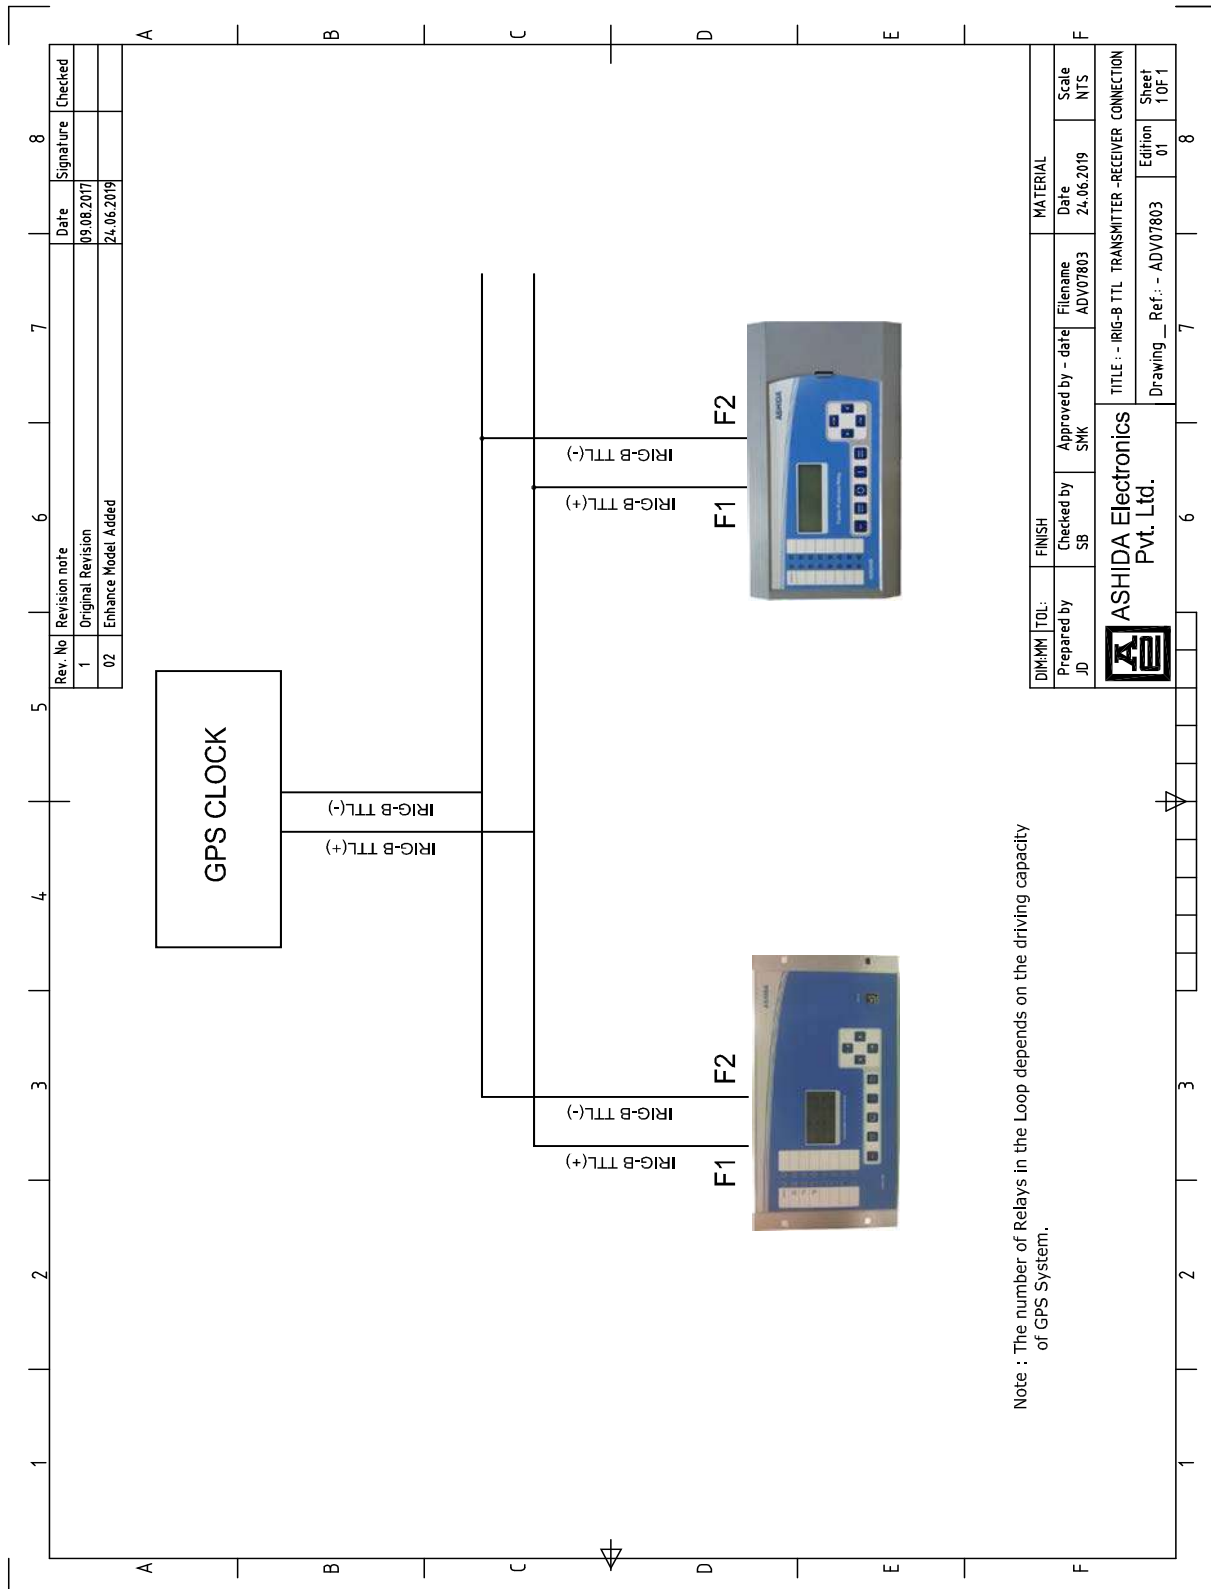

General Specifications:**AC Current Inputs:**

1A Nominal

5A Nominal

Thermal Withstand Capacity:

250 X In for 1s

50 X In for 3s

4 X In for Continuous duty

Dynamic Thermal rating:

1250 for 10ms

Burden Rating:

< 0.2VA for 1A Nominal

< 0.2VA for 5A Nominal

AC Voltage Inputs:

2 X Vn for Continuous duty

2.6 X Vn for 10s

Over Voltage Category III

Pollution Degree 2

Rated Insulation Voltage: 2.5kV

Burden: <0.2VA

System Frequency:

50Hz / 60Hz

Frequency Tracking: 45 – 55Hz for 50Hz
and 55 – 65Hz for 60Hz**Power Supply:**

Range: 24 to 230Vac/dc

Burden: < 15watts for DC

Digital Outputs:

Continuous carry: 5A

Make: 30A for 3s & 50A for 1s

Breaking capacity: 1250VA @ 250Vac,

100 watts @ 250Vdc resistive,

50 watts @ 250Vdc inductive (L/R = 45ms)

Digital Inputs:

Operating range: Threshold Voltage

24 – 230V AC/DC 18V

48 – 230V AC/DC 35V

110 – 230V AC/DC 77V

220VDC / 230VAC 154V

Communication Ports:

Front Port – USB

Rear Ports – RJ45 (10-100/Base T Copper) &
RS485IRIG-B Port – Demodulated (Optional)
(Burden 10mA (Avg) / 15mA (Peak))

Fiber Optic Port (Optional)

Operating Temperature:

Operating Temperature: -25°C to +65°C

Storage Temperature: -25°C to +70°C

Humidity: 95% RH

Weight: < 3.5kg approx.

Ordering Information:

Ordering Information												
	1-4	5	6	7	8	9	10	11	12	13	14	15
Model	245B	X	X	X	X	X	X	X	X	X	X	X
Example	245B	E	0	0	2	0	1	0	0	2	2	H
FEEDER PROTECTION												
Sub Type												
Enhanced Version	E											
Variant												
Standard		0										
With Sensitive EF		1										
Language												
English			0									
Protocol												
IEC 103					0							
MODBUS RTU					1							
IEC 61850					2							
MODBUS TCP					4							
IEC104					6							
CT / PT & RTD												
Default: 4CT, CT Selection: 1A/5A, 4PT: 63.5V					0							
4CT, CT Selection: 1A/5A, 3PT: 63.5V + 1PT: Sync Check					3							
Digital Outputs												
16DO					0							
11DO					1							
Digital Inputs												
10DI					0							
DI Setting Threshold												
18VDC					0							
35VDC					1							
77VDC					2							
154VDC					3							
Auxiliary Supply												
24 – 230 VDC / VAC					2							
24 – 230 VDC / VAC With 24VDC Pulse Output					4							
Cabinet Details												
Plug In					2							
Communication Ports												
Disable / No Rear Port					0							
RS-485 Rear Port					B							

10/100 Base-T Ethernet RJ45 Rear Port & RS-485 Rear Port	E
DUAL 10/100 Base-T Ethernet RJ45 Rear Port & RS-485 Rear Port	H
RS-485 Rear Port + IRIGB Port	I
10/100 Base-T Ethernet RJ45 Rear Port & RS-485 Rear Port + IRIGB Port	K
DUAL 10/100 Base-T Ethernet RJ45 Rear Port & RS-485 Rear Port + IRIGB Port	M
DUAL FO Ethernet Rear Port & RS-485 Rear Port	N
Single FO Ethernet Rear Port & RS-485 Rear Port	O
DUAL FO Ethernet Rear Port & RS-485 Rear Port + IRIGB Port	P
Single FO Ethernet Rear Port & RS-485 Rear Port + IRIGB Port	Q
DUAL FO Ethernet Rear Port & RS-485 Rear Port (with PRP)	S

ASHIDA ELECTRONICS PVT LTD.

All rights reserved.

All brand or product names appearing in this document are the trademark or registered trademark of their respective holders. No ASHIDA trademarks may be used without written permission.

The information in this document is provided for informational use only and is subject to change without legal notice. ASHIDA ELECTRONICS PVT LTD. has approved only the English language document.



ASHIDA Electronics Pvt. Ltd.
ASHIDA House, Plot No. A-308, Road No. 21,
Wagle Industrial Estate, Thane - 400604, INDIA
Tel : +91 - 22 - 2582 7524/6129 9100
Fax : +91 - 22 - 2580 4262
Email : sales@ashidaelectronics.com
Web : www.ashidaelectronics.com

